


fanco 

Ceiling Fan Collection

2026

Collection Index

Model		Page No	Motor	Blade	Location
Gaia EarthFirst		3 - 6	DC	FSC® Certified Solid Timber	Indoor
Wynd EarthFirst		7 - 8	DC	FSC® Certified Solid Timber	Indoor
Flow		9 - 10	DC	ABS Plastic	Indoor
Breeze		11 - 12	AC	ABS Plastic	Indoor Outdoor* Coastal
Eco Style		13 - 16	DC	ABS Plastic	Indoor Outdoor*
Eco Silent Pro		17 - 20	DC	ABS Plastic	Indoor Outdoor* Coastal
Infinity-iD		21 - 24	DC	ABS Plastic	Indoor Outdoor* Coastal
Horizon		25 - 26	DC	ABS Plastic	Indoor Outdoor* Coastal
Wynd		27 - 28	DC	Solid Timber	Indoor
Sanctuary		29- 32	DC	Solid Timber	Indoor Outdoor* Coastal
Sanctuary XL		33 - 34	DC	Solid Timber	Indoor Outdoor* Coastal

*All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Wall Control

Includes wall control mechanism

Remote

Includes remote control

Remote / SMART

Includes Remote & SMART functionality

Tri Control - No Light Only

Includes Remote, SMART & Wall Control. All can work in tandem

Control	Size Options	Light Option	Colour Options
Remote	48" (122cm) 54" (137cm)	22w CCT LED Dimmable	
Remote	52" (132cm) 60" (152cm)	22w CCT LED Dimmable	
Remote	52" (132cm)	22w CCT LED Dimmable	 
Wall Control	48" (122cm) 52" (132cm)	18w CCT LED Not Dimmable	   
Remote	52" (132cm) 60" (152cm)	18w CCT LED Dimmable	   
Wall Control Remote	48" (122cm) 52" (132cm)	18w CCT LED Dimmable	 
Remote / SMART Tri Control	48" (122cm) 54" (137cm) 64" (162cm)	18w CCT LED Dimmable	   
Remote / SMART Tri Control	52" (132cm) 64" (162cm)	18w CCT LED Dimmable	 
Remote	54" (137cm)	No Light	    
Remote	52" (132cm) 70" (177cm)	24w CCT LED Dimmable	     
Remote	86" (218cm) 92" (234cm)	24w CCT LED Dimmable	     

Gaia

DC

Registered Design
202413058 | 202413059

Part of the EarthFirst  Range

Featuring FSC® 100%
Certified solid timber blades
& Bio-based plastic motor
housing with a unique 'Ecrú'
colour and terrazzo texture.

Ecrú Motor / Natural Blades No Light



F2200/619A 48"

F2210/619A 54"

With Base Cap (Light Adaptable)



F2201/619A 48"

F2211/619A 54"

CCT LED Light



KF2201/619A 48"

KF2211/619A 54"



**GOOD
DESIGN
AWARD®
WINNER**

**8
Year** 8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	FSC® Certified Solid Timber
Reversible:	Yes
Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	12° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency 433 MHz



Biobased plastic
Motor Housing

FSC® Certified
Solid Timber Blades



Performance 48"

Speed	Wattage	RPM	Airflow
1	1	60	3,070
2	3	85	5,343
3	6	115	7,932
4	9	140	9,280
5	14	165	11,665
6	26	195	12,973

Performance 54"

Speed	Wattage	RPM	Airflow
1	2	60	5,493
2	5	85	7,673
3	8	105	10,334
4	13	125	12,369
5	19	145	14,685
6	30	165	14,870

About the CCT LED Light

		
3000k 1584 Lumens	4000k 1754 Lumens	5000k 1696 Lumens



Light Type: LED (22w)

Dimmable: Yes (Stepless)

FCSP13-AF003 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

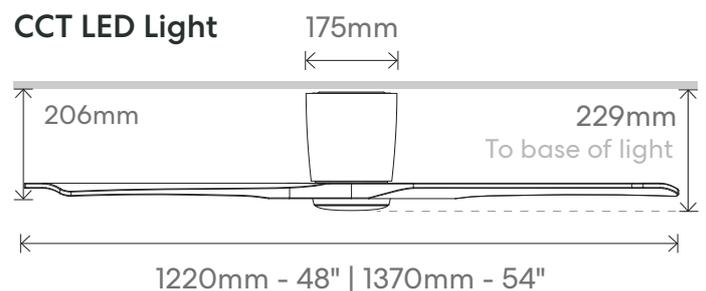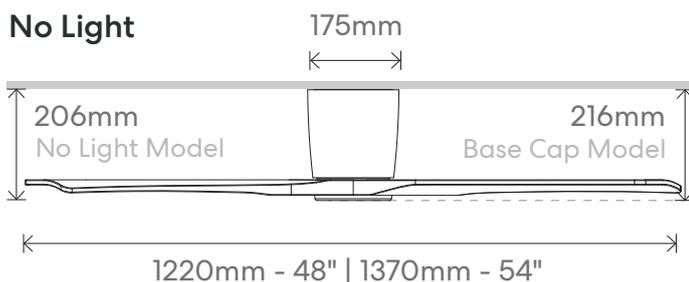





**GOOD
DESIGN
AWARD[®]
WINNER**



Wynd

DC

Part of the EarthFirst  Range

Featuring FSC® 100% Certified solid timber blades & Bio-based plastic motor housing with a unique 'Ecrú' colour and terrazzo texture.

Ecrú Motor / Natural Blades No Light



F2310/619A 52"

F2320/619A 60"



With Base Cap (Light Adaptable)



F2311/619A 52"

F2321/619A 60"



CCT LED Light



KF2311/619A 52"

KF2321/619A 60"



Technical Data

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	FSC® Certified Solid Timber
Reversible:	Yes
Mount Angle:	0-14°
Blade Pitch:	12° (Approx)
Timer:	1, 4, 8 Hour

Remote

Supplied with remote control Remote frequency 433 MHz



Biobased plastic
Motor Housing

FSC® Certified
Solid Timber Blades



Performance 52"

Speed	Wattage	RPM	Airflow
1	3	60	4,184
2	5	90	6,351
3	9	120	8,259
4	15	145	9,403
5	22	175	11,766
6	30	200	13,031

Performance 60"

Speed	Wattage	RPM	Airflow
1	5	60	5,928
2	8	85	7,922
3	11	110	10,334
4	17	135	12,019
5	26	160	15,565
6	38	185	17,332

About the CCT LED Light

3000k	4000k	5000k
1584 Lumens	1754 Lumens	1696 Lumens


Light Type:	LED (22w)
Dimmable:	Yes (Stepless)

FCSP13-AF003 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

No Light

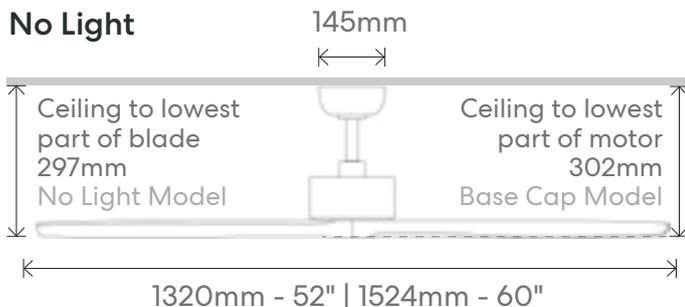

CCT LED Light

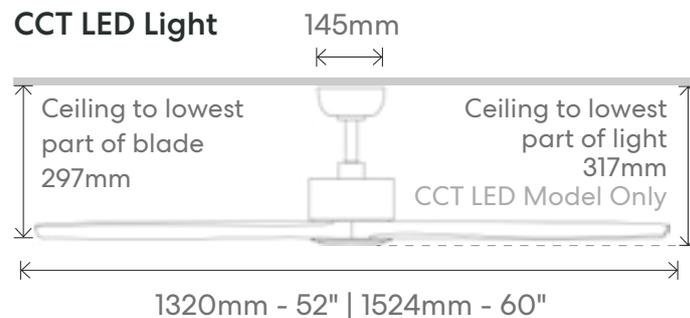

Extension Rods

Ecu	
K008M/606A	600mm
K008M/612A	1200mm

Flow

DC

Registered Design
202415744 | 202413855

A testament to innovative design with three dynamic blades elegantly curved around the motor making it a stylish addition to any space.

White
No Light
F0150/101A



Black
No Light
F0150/202A



White
CCT LED Light Kit
KF0151/101A



Black
CCT LED Light Kit
KF0151/202A



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	13° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency 433 MHz

Performance

Speed	Wattage	RPM	Airflow
1	2	60	3,919
2	3	90	5,936
3	7	120	8,391
4	12	150	8,947
5	20	180	11,354
6	31	210	13,386



About the CCT LED Light

●	●	●
3000k 2291 Lumens	4000k 2588 Lumens	5000k 2506 Lumens

Light Type: LED (22w)


Dimmable: Yes

FCSP13-AF003 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions

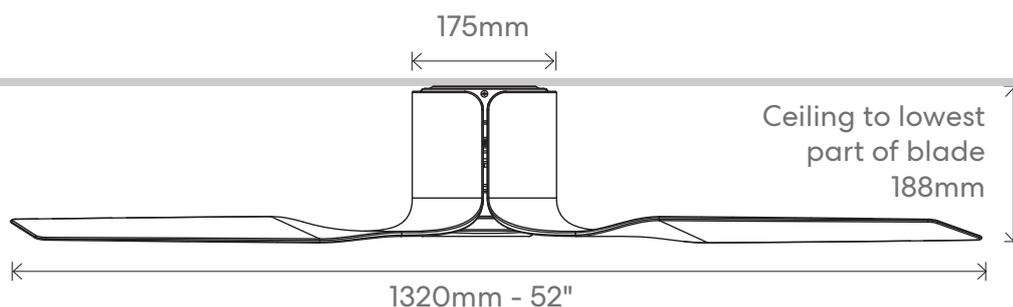

Breeze

AC

Flowing design that produces a calming breeze. The perfect complement to a modern living space.

F0110/101B 48" White



F0100/101B 52"

F0100/202B 52" Black



F0100/205B 52" Black / Koa



F0110/121B 48" White / Beechwood



F0100/121B 52"

F0111/101B 48" White CCT LED



F0101/101B 52"

F0101/202B 52" Black CCT LED



F0101/205B 52" Black / Koa CCT LED



F0111/121B 48" White / Beechwood CCT LED



F0101/121B 52"



8
Year

8 Year Motor Warranty
2 year in home + 6 year motor replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	AC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	12° (Approx)
Timer:	No

Wall Control



Supplied with 3 speed wall control mechanism,


Performance 48"

Speed	Wattage	RPM	Airflow
1	16.5	136	4,856
2	27	179	7,550
3	44	222	9,950

Performance 52"


Speed	Wattage	RPM	Airflow
1	15	106	5,622
2	26	154	7,283
3	45	206	9,030

About the CCT LED Light

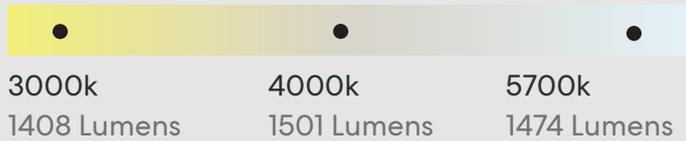

Light Type:	LED (18w)
Dimmable:	No

No Light

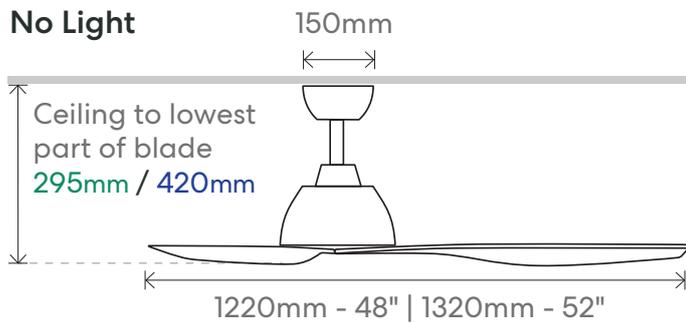

CCT LED Light



Extension Rods

White		Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/118A	1800mm	K505M/218A	1800mm

Eco Style

DC 52"

A contemporary three blade design to complement modern decor inside and outside the home.



White
F4010/101A



White / Beechwood
F4010/121A



Black
F4010/202A



Black / Koa
F4010/205A



White
CCT LED
F4011/101A



White / Beechwood
CCT LED
F4011/121A



Black
CCT LED
F4011/202A



Black / Koa
CCT LED
F4011/205A



52"
1320mm

8
Year
8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	15° (Approx)
Timer:	1, 4, 8 Hour

Remote




Supplied with remote control

Remote frequency
433 MHz

Performance


Speed	Wattage	RPM	Airflow
1	3.8	75	5,010
2	9.5	125	7,860
3	14	140	8,250
4	18.5	160	8,950
5	24	170	9,378
6	33	190	9,641

About the CCT LED Light

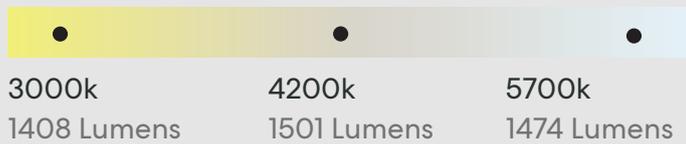

Light Type:	LED (18w)
Dimmable:	Yes (Stepless)

FCSP13-FM004 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.

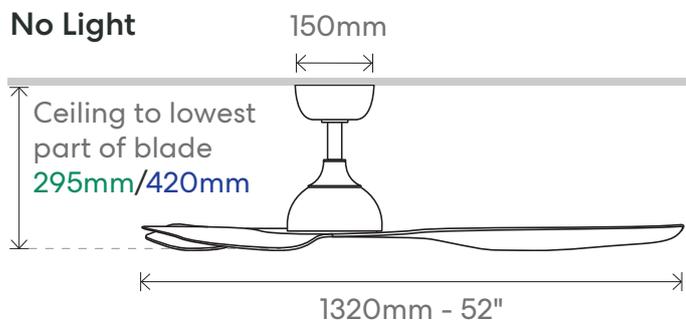

Extension Rods - No Light

White		Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/118A	1800mm	K505M/218A	1800mm



Extension Rods - CCT LED

White		Black	
K5061/109A	900mm	K5061/209A	900mm
K5061/118A	1800mm	K5061/218A	1800mm

Eco Style

DC 60"

A contemporary large diameter three blade design well suited to larger living spaces.

White
F4020/101A



White / Beechwood
F4020/121A



Black
F4020/202A



Black / Koa
F4020/205A



White
CCT LED
F4021/101A



White / Beechwood
CCT LED
F4021/121A



Black
CCT LED
F4021/202A



Black / Koa
CCT LED
F4012/205A



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	15° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency
433 MHz

Performance

Speed	Wattage	RPM	Airflow
1	5.6	80	6,880
2	8.3	96	8,050
3	11	113	9,290
4	17	136	10,500
5	27	164	13,500
6	40	191	15,200

About the CCT LED Light



●	●	●
3000k 1435 Lumens	4200k 1474 Lumens	6000k 1461 Lumens

Light Type:	LED (24w)
Dimmable:	Yes (Stepless)

FCSP13-FM004 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



No Light

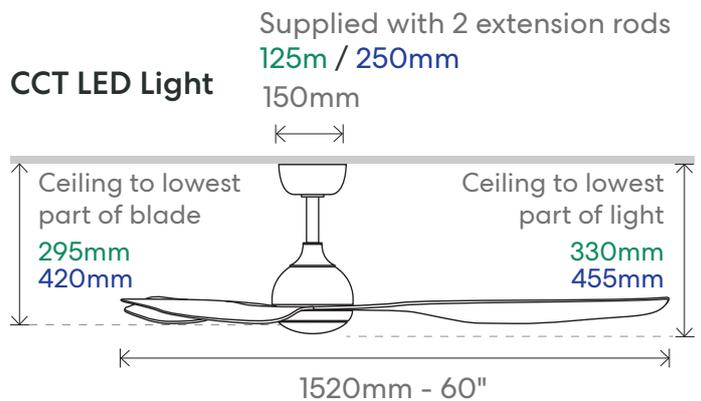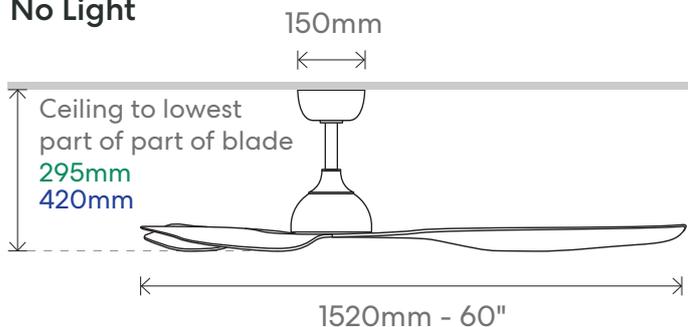

Extension Rods - No Light

White		Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/118A	1800mm	K505M/218A	1800mm

Extension Rods - CCT LED

White		Black	
K5061/109A	900mm	K5061/209A	900mm
K5061/118A	1500mm	K5061/218A	1800mm

Eco Silent Pro DC

A modern four-blade profile crafted for silent airflow and timeless design, suitable for both interior and covered outdoor use.

White No Light



With Remote

F1100/101C 48"

F1120/101C 52"

SMART Adaptable

White CCT LED Light



With Remote

F1101/101C 48"

F1121/101C 52"

SMART Adaptable

Black No Light



With Remote

F1120/202C 52"

SMART Adaptable

Black CCT LED Light



With Remote

F1121/202C 52"

SMART Adaptable



Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-18°
Blade Pitch:	10° (Approx)
Timer:	1, 4, 8 Hour

Performance 48"

Speed	Wattage	RPM	Airflow
1	1.3	60	3,449
2	2	90	4,507
3	5	130	6,781
4	10	170	8,147
5	20.5	215	10,357
6	36	255	12,000

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz



Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.



Performance 52"

Speed	Wattage	RPM	Airflow
1	1.3	60	3,908
2	3	95	5,746
3	7	130	7,787
4	14	165	9,659
5	24.5	200	11,393
6	40	215	13,283

About the CCT LED Light

3000k	4000k	5000k
1400 Lumens	1585 Lumens	1695 Lumens

Light Type:

LED (20w)

Dimmable:

Yes (Stepless)


FCSP13-CT001 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.


Dimensions

No Light

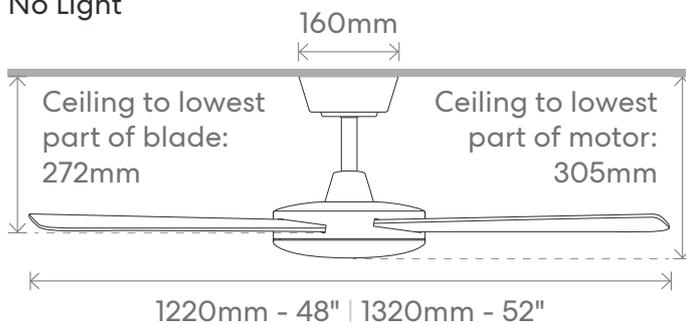

Dimensions based off supplied 139mm Rod

CCT LED Light

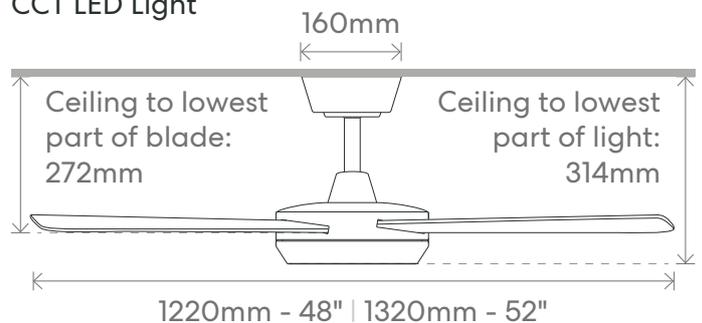

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Eco Silent Pro DC 56"

A modern four-blade profile crafted for silent airflow and timeless design, suitable for both interior and covered outdoor use.

White No Light



With Remote

F1140/101C 56"

SMART Adaptable

White CCT LED Light



With Remote

F1141/101C 56"

SMART Adaptable

Black No Light



With Remote

F1140/202C 56"

SMART Adaptable

Black CCT LED Light



With Remote

F1141/202C 56"

SMART Adaptable



8 Year
8 Year Motor Warranty
2 year in home
+ 6 year motor replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-18°
Blade Pitch:	10° (Approx)
Timer:	1, 4, 8 Hour

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz



Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.



Performance 56"

Speed	Wattage	RPM	Airflow
1	1.8	60	4,479
2	3	85	6,871
3	6.5	115	8,517
4	13.5	145	11,171
5	24	175	13,346
6	40	195	15,388

About the CCT LED Light

3000k	4000k	5000k
1400 Lumens	1585 Lumens	1695 Lumens

Light Type: LED (20w)

Dimmable: Yes (Stepless)


FCSP13-CT001 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.


Dimensions

No Light

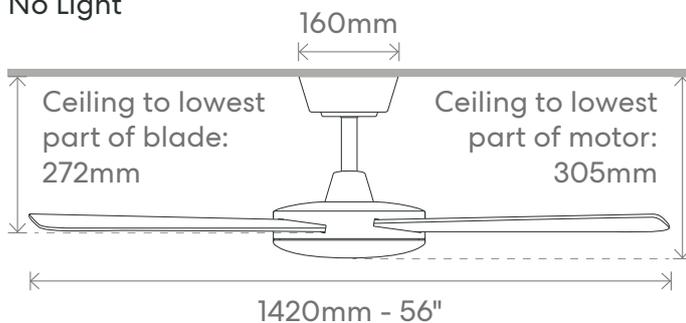

Dimensions based off supplied 139mm Rod

CCT LED Light

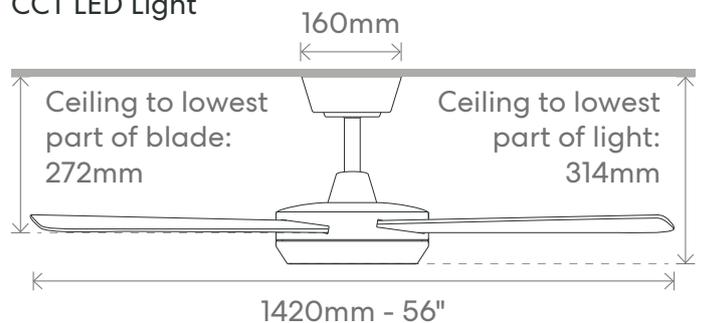

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Infinity-iD

DC

A modern architectural fan offering energy efficient airflow for bedrooms, outdoors, with modular SMART control for cohesive design.

White No Light

With Remote

F8000/101C 48"

F8030/101C 54"

SMART Adaptable



White CCT LED Light

With Remote

F8001/101C 48"

F8031/101C 54"

SMART Adaptable



White / Beechwood No Light

With Remote

F8000/121C 48"

F8030/121C 54"

SMART Adaptable



White / Beechwood CCT LED Light

With Remote

F8001/121C 48"

F8031/121C 54"

SMART Adaptable



Black No Light

With Remote

F8000/202C 48"

F8030/202C 54"

SMART Adaptable



Black CCT LED Light

With Remote

F8001/202C 48"

F8031/202C 54"

SMART Adaptable



8 Year **8 Year Motor Warranty**
 2 year in home + 6 year motor replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-10°
Blade Pitch:	14° (Approx)
Timer:	1, 4, 8 Hour

Performance 48"

Speed	Wattage	RPM	Airflow
1	1	60	2,773
2	2	90	4,863
3	5	130	7,129
4	10.5	170	8,843
5	21.5	215	10,870
6	39	255	12,573

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz



Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.



Performance 54"

Speed	Wattage	RPM	Airflow
1	1.5	60	3,920
2	3.5	90	7,095
3	7	120	8,789
4	15	150	10,853
5	28	180	12,556
6	39.5	200	14,125

About the CCT LED Light

3000k	4000k	5000k
1309 Lumens	1495 Lumens	1608 Lumens

Light Type: LED (20w)

Dimmable: Yes (Stepless)


FCSP13-CT002 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.


Dimensions

No Light

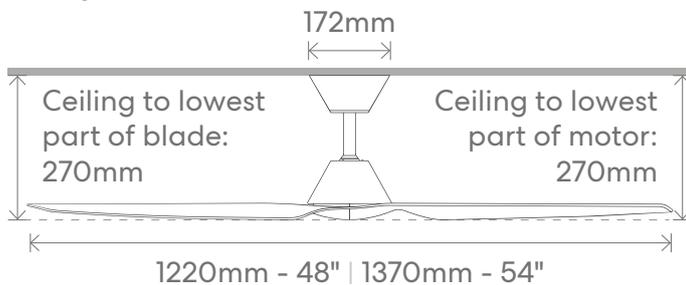

Dimensions based off supplied 600mm Rod

CCT LED Light

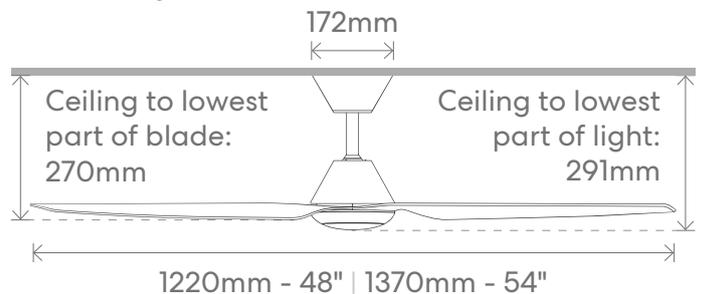

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Infinity-iD

DC 60"

A modern architectural 60-inch fan designed for large interiors and outdoor zones, delivering energy efficient performance with modular SMART control.

White No Light

With Remote

KF8060/101C 60"

SMART Adaptable



White CCT LED Light

With Remote

KF8061/101C 60"

SMART Adaptable



White / Beechwood No Light

With Remote

KF8060/121C 60"

SMART Adaptable



White / Beechwood CCT LED Light

With Remote

KF8061/121C 60"

SMART Adaptable



Black No Light

With Remote

KF9060/202C 60"

SMART Adaptable



Black CCT LED Light

With Remote

KF9061/202C 60"

SMART Adaptable



60"
1520mm

8 Year
8 Year Motor Warranty
2 year in home
+ 6 year motor replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-10°
Blade Pitch:	14° (Approx)
Timer:	1, 4, 8 Hour

Performance 60"

Speed	Wattage	RPM	Airflow
1	2	60	5,834
2	4	85	8,086
3	8	110	9,735
4	14	130	10,914
5	24	155	12,941
6	39	180	14,958

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz



Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.



About the CCT LED Light

●	●	●
3000k	4000k	5000k
1309 Lumens	1495 Lumens	1608 Lumens

Light Type:

LED (20w)

Dimmable:

Yes (Stepless)


FCSP13-CT002 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.


Dimensions

No Light

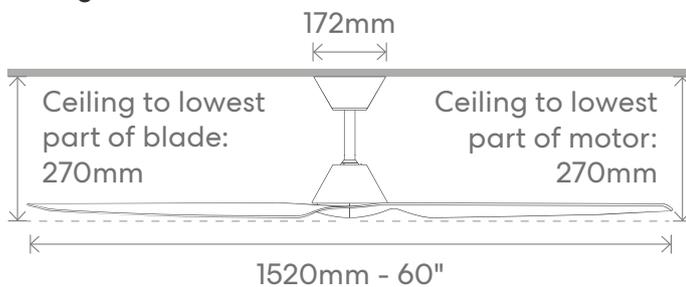

Dimensions based off supplied 600mm Rod

CCT LED Light

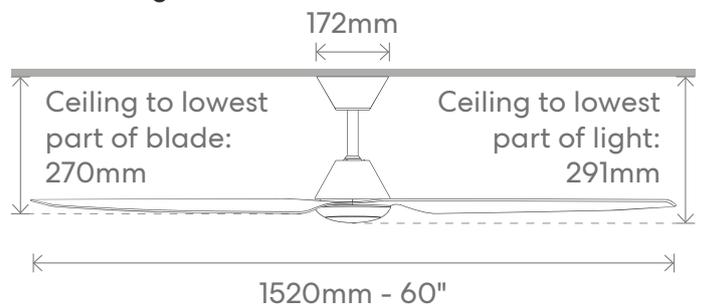

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Horizon

DC

Rated for covered outdoor and coastal areas, the expansive Horizon range represents a high airflow cooling solution for almost any space.

White
No Light



Remote / SMART		Tri Control	
F3000/101C	52"	KF3010/101C	52"
F3020/101C	64"	KF3030/101C	64"

White
CCT LED Light



Remote / SMART	
KF3001/101C	52"
KF3021/101C	64"

Black
No Light



Remote / SMART		Tri Control	
FC3000/202C	52"	KF3010/202C	52"
FC3020/202C	64"	KF3030/202C	64"

Black
CCT LED Light



Remote / SMART	
KF3001/202C	52"
KF3021/202C	64"



Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	17° (Approx)
Timer:	1-9 Hour

Remote / SMART



Supplied with remote control & SMART functionality

Remote frequency 2.4 GHz

Tri Control

No Light Models only



Supplied with wall control & remote that work in tandem as well as SMART functionality



Performance 52"

Speed	Wattage	RPM	Airflow
1	5.3	60	3,240
2	6.5	88	5,760
3	8.8	116	7,551
4	13.1	145	9,829
5	18.5	174	12,277
6	25.3	200	13,862

Performance 64"

Speed	Wattage	RPM	Airflow
1	4.9	60	6,913
2	7.1	88	8,821
3	11.6	116	10,881
4	18.6	145	13,998
5	30	174	17,376
6	45	190	19,010

About the CCT LED Light

		
3000k 1300 Lumens	4200k 1600 Lumens	5000k 1500 Lumens

Light Type: LED (18w)


Dimmable: Yes (Stepless)

SP13-MK012 (White) SP13-MK011 (Black)
User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions

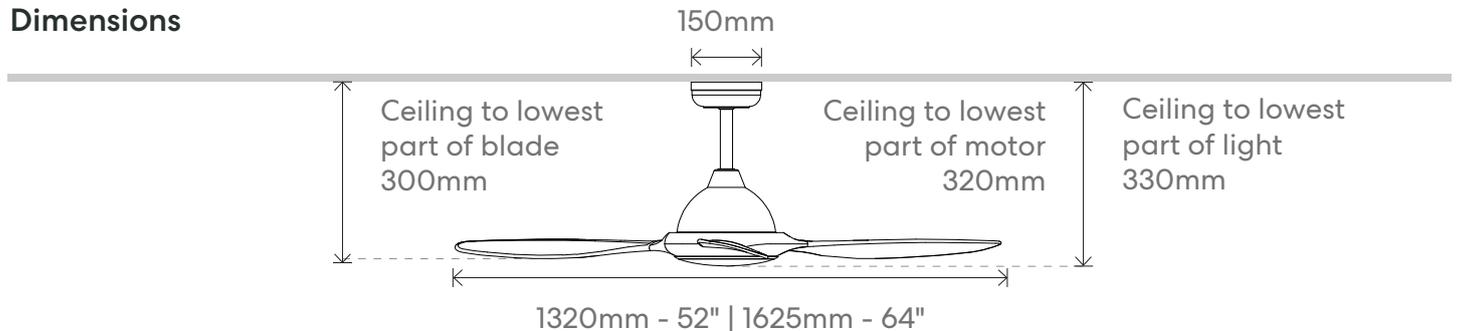

Extension Rods

White		Black	
K500M/109A	900mm	K500M/209A	900mm
K500M/115A	1500mm	K500M/215A	1500mm

Wynd DC

Earthy design features with luxuriously hand-rafted timber blades.

Matte White
Whitewash Blades
F0500/120C



Oil Rubbed Bronze
Walnut Blades
F0500/717C



Matte White
Natural Blades
F0500/119C



Matte Black
Natural Blades
F0500/219C



Matte Black
Teak Blades
F0500/218C



54"
1370mm

RECOMMENDED
CHOICE
February 2026

8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	Solid Timber
Reversible:	Yes
Mount Angle:	0-14°
Blade Pitch:	11° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control


Remote frequency 433 MHz

Performance

Speed	Wattage	RPM	Airflow
1	1	60	4,642
2	3	90	6,754
3	6	120	8,577
4	11	150	11,033
5	17	180	13,020
6	28	210	14,782



Dimensions

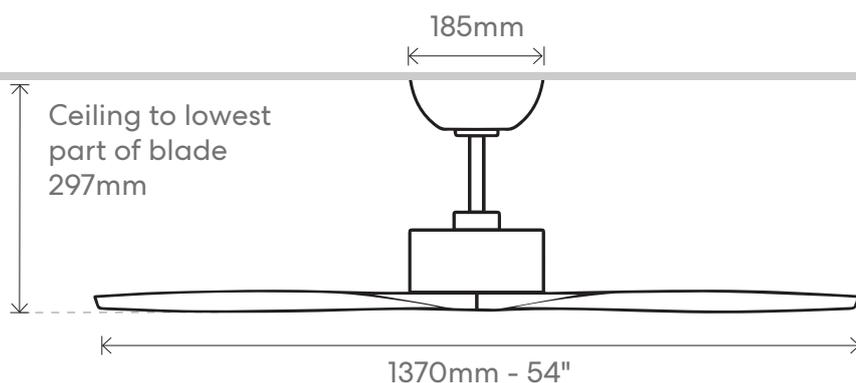

Extension Rods

Matte White		Matte Black		Oil Rubbed Bronze	
K004M/106A	600mm	K004M/206A	600mm	K004M/706A	600mm
K004M/112A	1200mm	K004M/212A	1200mm	K004M/712A	1200mm

Sanctuary

DC 52"

New for 2023/24 - the stunning solid timber sanctuary is now available in a practical 52" size - perfect for bedrooms!

Matte Black
Natural Blades



No Light
F6000/219A
CCT LED
F6001/219A



Matte Black
Teak Blades



No Light
F6000/218A
CCT LED
F6001/218A



Matte White
Whitewash Blades



No Light
F6000/120A
CCT LED
F6001/120A



Matte White
Natural Blades



No Light
F6000/119A
CCT LED
F6001/119A




Matte White
Teak Blades



No Light
F6000/118A
CCT LED
F6001/118A



52"
1320mm

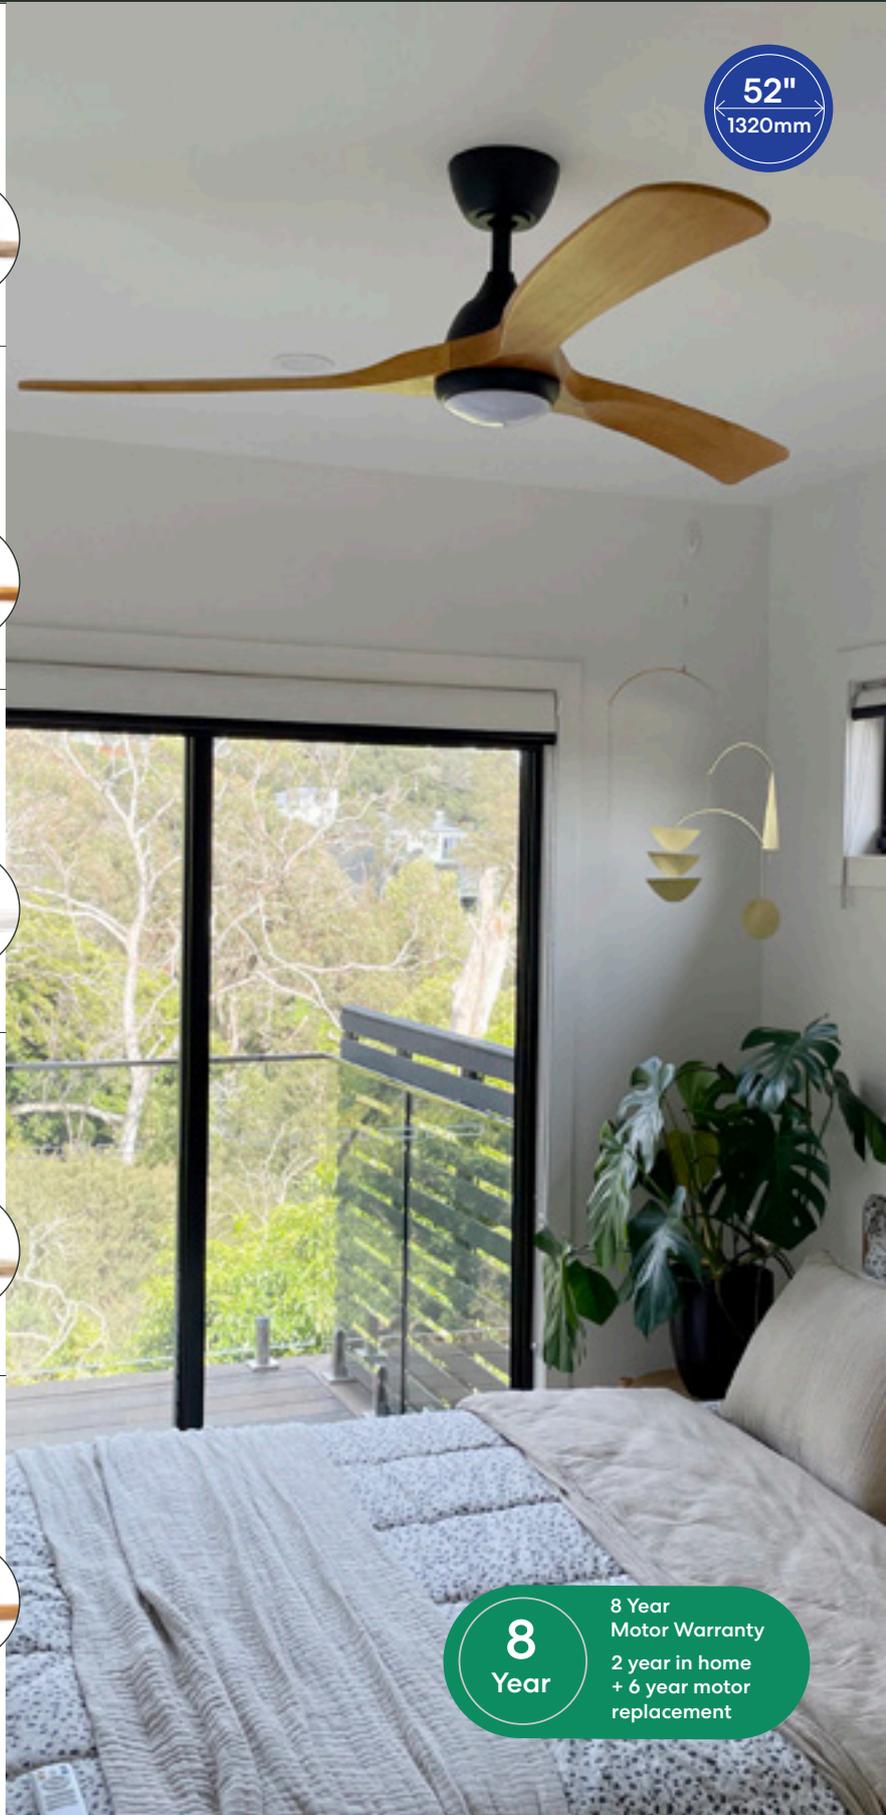

8
Year
8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	10° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency 433 MHz

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance

Speed	Wattage	RPM	Airflow
1	5.7	69	3,012
2	7.8	94	3,820
3	11.5	113	4,010
4	16.2	133	5,332
5	25.4	155	7,020
6	40	181	8,860



About the CCT LED Light

3000k	4000k	6000k
1356 Lumens	1600 Lumens	1421 Lumens


Light Type:	LED (24w)
Dimmable:	Yes (Stepless)

FCSP13-FM001 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions No Light

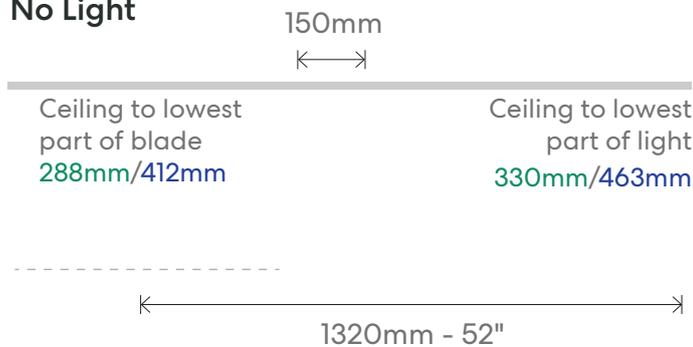


Extension Rods - No Light

Matte White		Matte Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/115A	1500mm	K505M/215A	1500mm

CCT LED Light

Supplied with 2 extension rods
125mm / 250mm
150mm
←→

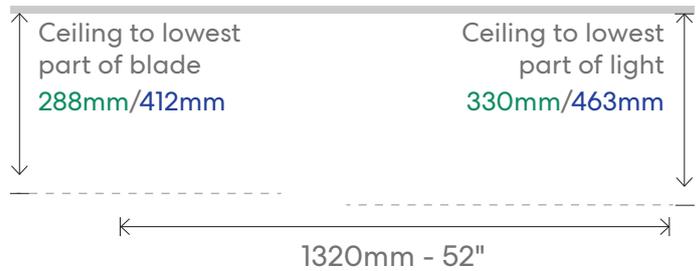

Extension Rods - CCT LED

Matte White		Matte Black	
K5061M/109A	900mm	K5061M/209A	900mm
K5061M/115A	1500mm	K5061M/215A	1500mm

Sanctuary

DC 70"

A stunning fan to improve airflow and cooling in open plan areas and covered outdoor spaces. Now available with or without LED light.

Matte Black
Natural Blades



No Light
KF6010/219A
CCT LED
KF6011/219A



Matte Black
Teak Blades



No Light
KF6010/218A
CCT LED
KF6011/218A



Matte White
Whitewash Blades



No Light
KF6010/101A
CCT LED
KF6011/101A



Matte White
Natural Blades



No Light
KF6010/119A
CCT LED
KF6011/219A



Matte White
Teak Blades



No Light
KF6010/118A
CCT LED
KF6011/118A



Matte Black
Black Blades



No Light
KF6010/202A
CCT LED
KF6011/202A



70"
1778mm



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	10° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency 433 MHz

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance

Speed	Wattage	RPM	Airflow
1	5.4	55	3,150
2	10.3	86	5,230
3	15	103	6,879
4	20	115	8,520
5	26	128	9,053
6	38	147	11,176



About the CCT LED Light

3000k 1435 Lumens	4000k 1474 Lumens	6000k 1461 Lumens

Light Type: LED (24w)


Dimmable: Yes (Stepless)

FCSP13-FM004 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions

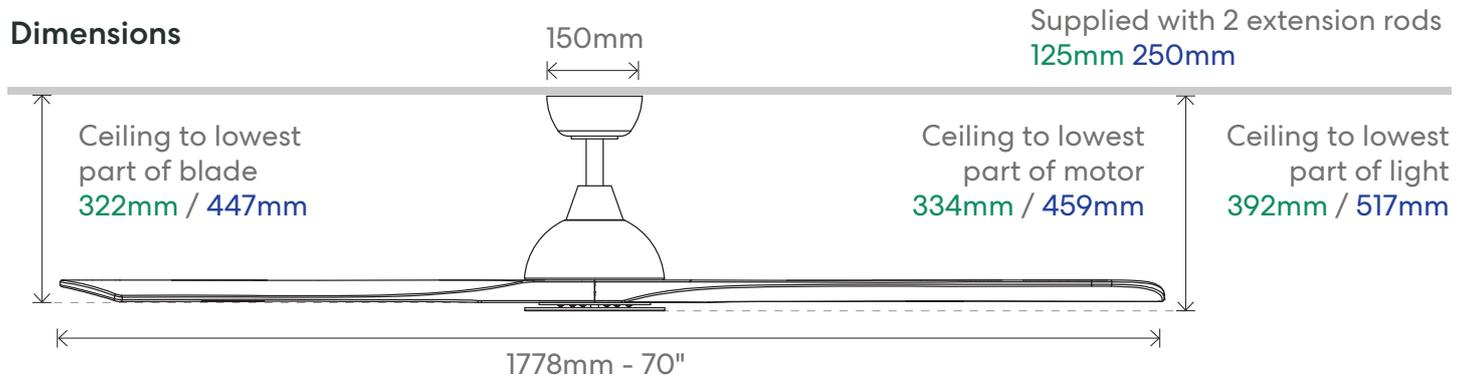

Extension Rods - No Light

Matte White		Matte Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/115A	1500mm	K505M/215A	1500mm

Extension Rods - CCT LED

Matte White		Matte Black	
K5061M/109A	900mm	K5061M/209A	900mm
K5061M/115A	1500mm	K5061M/215A	1500mm

Sanctuary

XL DC

Drawing broad strokes from solid timber blades, the Fanco Sanctuary creates an instant refuge from the heat.

Matte Black
Natural Blades



No Light

KF6020/219A 86"

KF6030/219A 92"

CCT LED

KF6021/219A 86"

KF6031/219A 92"

Matte Black
Teak Blades



No Light

KF6020/218A 86"

KF6030/218A 92"

CCT LED

KF6021/218A 86"

KF6031/218A 92"

Matte White
Whitewash Blades



No Light

KF6020/101A 86"

KF6030/101A 92"

CCT LED

KF6021/101A 86"

KF6031/101A 92"

Matte White
Natural Blades



No Light

KF6020/119A 86"

KF6030/119A 92"

CCT LED

KF6021/119A 86"

KF6031/119A 92"

Matte White
Teak Blades



No Light

KF6020/118A 86"

KF6030/118A 92"

CCT LED

KF6021/118A 86"

KF6031/118A 92"

Matte Black
Black Blades



No Light

KF6020/202A 86"

KF6030/202A 92"

CCT LED

KF6021/202A 86"

KF6031/202A 92"



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	10° (Approx)
Timer:	1, 4, 8 Hour

Remote



Supplied with remote control

Remote frequency
433 MHz

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance 86"

Speed	Wattage	RPM	Airflow
1	12	78	3,460
2	15.6	87	6,569
3	22.2	98	9,089
4	30	110	11,246
5	39.8	121	12,005
6	54.3	131	14,052

Performance 92"


Speed	Wattage	RPM	Airflow
1	12	75	3,610
2	15.7	86	7,796
3	22.5	93	11,152
4	30.4	105	12,896
5	40	116	14,058
6	54.8	127	16,235

About the CCT LED Light

3000k 1435 Lumens	4000k 1474 Lumens	6000k 1461 Lumens


Light Type:	LED (24w)
Dimmable:	Yes (Stepless)

FCSP13-FM004 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions

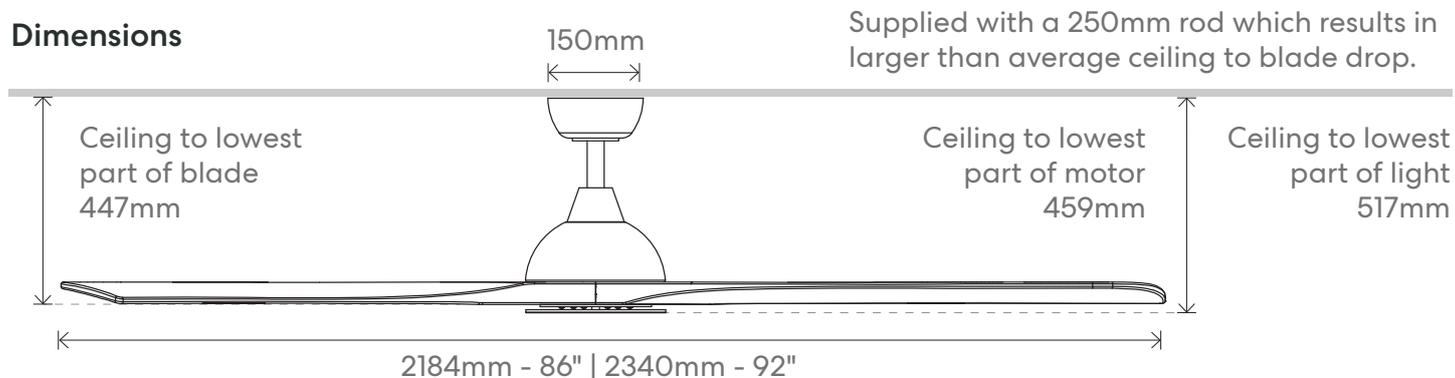

Extension Rods - No Light

Matte White		Matte Black	
K505M/109A	900mm	K505M/209A	900mm
K505M/115A	1500mm	K505M/215A	1500mm

Extension Rods - CCT LED

Matte White		Matte Black	
K5061M/109A	900mm	K5061M/209A	900mm
K5061M/115A	1500mm	K5061M/215A	1500mm

fanco 

www.fanco.com.au