

Infinity-iD

DC

A modern architectural fan offering energy efficient airflow for bedrooms, outdoors, with modular SMART control for cohesive design.

White No Light

With Remote

F8000/101C 48"

F8030/101C 54"

SMART Adaptable



White CCT LED Light

With Remote

F8001/101C 48"

F8031/101C 54"

SMART Adaptable



White / Beechwood No Light

With Remote

F8000/121C 48"

F8030/121C 54"

SMART Adaptable



White / Beechwood CCT LED Light

With Remote

F8001/121C 48"

F8031/121C 54"

SMART Adaptable



Black No Light

With Remote

F8000/202C 48"

F8030/202C 54"

SMART Adaptable



Black CCT LED Light

With Remote

F8001/202C 48"

F8031/202C 54"

SMART Adaptable



Technical Data

* All outdoor fans must be in an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-10°
Blade Pitch:	14° (Approx)
Timer:	1, 4, 8 Hour

Performance 48"

Speed	Wattage	RPM	Airflow
1	1	60	2,773
2	2	90	4,863
3	5	130	7,129
4	10.5	170	8,843
5	21.5	215	10,870
6	39	255	12,573

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz



Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.



Performance 54"

Speed	Wattage	RPM	Airflow
1	1.5	60	3,920
2	3.5	90	7,095
3	7	120	8,789
4	15	150	10,853
5	28	180	12,556
6	39.5	200	14,125


About the CCT LED Light

3000k	4000k	5000k
1309 Lumens	1495 Lumens	1608 Lumens

Light Type: LED (20w)

Dimmable: Yes (Stepless)


FCSP13-CT002 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.


Dimensions

No Light

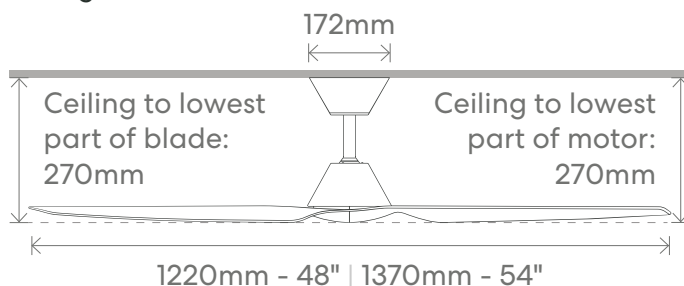

Dimensions based off supplied 600mm Rod

CCT LED Light

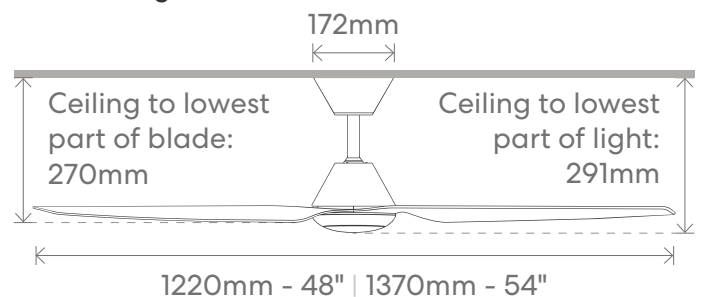

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Infinity-iD

DC 64"

The Architecturally inspired favourite now available in a larger, 64 inch diameter option for Summer 2023/24.

Remote / SMART

F8040/101B

White



Tri Control

KF8050/101B

Remote / SMART

F8040/202B

Black



Tri Control

KF8050/202B

Remote / SMART

F8040/121B

White /
Beechwood



Tri Control

KF8050/121B

Remote / SMART

F8041/101B

White
CCT LED



Remote / SMART

F8041/202B

Black
CCT LED



Remote / SMART

F8041/121B

White /
Beechwood
CCT LED



64"
1620mm



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-7°
Blade Pitch:	12° (Approx)
Timer:	1-9 Hour

Remote / SMART



Supplied with remote control & SMART functionality

Remote frequency 2.4 GHz

Tri Control

No Light Models only



Supplied with wall control & remote that work in tandem as well as SMART functionality

Performance 64"

Speed	Wattage	RPM	Airflow
1	4.6	60	6,983
2	6.4	85	8,136
3	9.6	109	9,045
4	14.1	133	10,795
5	22.3	156	11,589
6	32.5	180	13,658


About the CCT LED Light

3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type: LED (18w)


Dimmable: Yes (Stepless)

SP13-MK013 (White) SP13-MK014 (Black)
User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

No Light

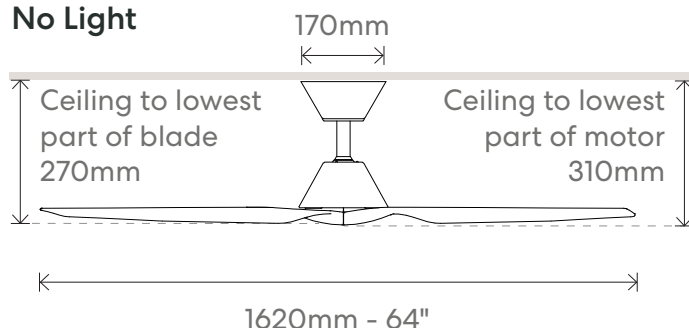

CCT LED Light

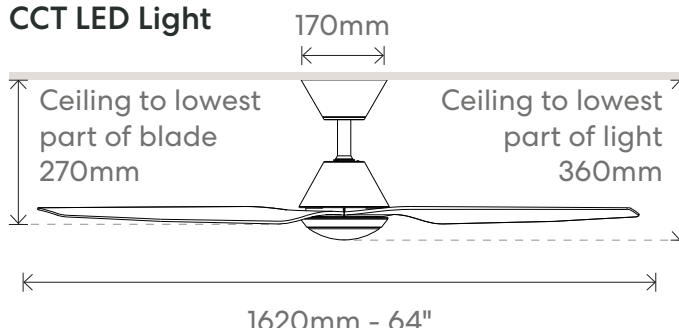

Extension Rods

White		Black	
K500M/109A	900mm	K500M/209A	900mm
K500M/115A	1500mm	K500M/215A	1500mm