


Infinity-iD Profile DC

The low-profile architectural fan designed for Australian homes, delivering energy-efficient airflow, outdoor versatility & modular SMART control.

White No Light

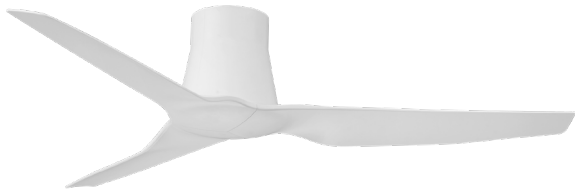

With Remote

F8110/101A 48"

F8120/101A 54"

SMART Adaptable

White CCT LED Light



With Remote

F8111/101A 48"

F8121/101A 54"

SMART Adaptable

White / Beechwood No Light



With Remote

F8110/121A 48"

F8120/121A 54"

SMART Adaptable

White / Beechwood CCT LED Light



With Remote

F8111/121A 48"

F8121/121A 54"

SMART Adaptable



Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	13.3° (48") / 14.5° (54")
Timer:	1, 4, 8 Hour

Performance 48"

Speed	Wattage	RPM	Airflow
1	1.3	60	2,636
2	2.2	90	4,590
3	5.2	130	6,337
4	10.5	170	7,913
5	21	215	9,746
6	36	255	11,352

Control Options

Remote:

Supplied with no beep remote control.

Remote frequency: 433 MHz

Remote + **SMART** Module:

F9990/000A SMART Module.




Allows fan to be controlled by app, & remote control in tandem.



Performance 54"

Speed	Wattage	RPM	Airflow
1	1.7	60	4,252
2	3.8	90	6,261
3	7.8	120	8,453
4	15	150	9,692
5	28	180	11,151
6	40	200	13,191

About the CCT LED Light

		
3000k	4000k	5000k
1309 Lumens	1495 Lumens	1608 Lumens


Light Type:

LED (20w)

Dimmable:

Yes (Stepless)


FCSP13-CT002 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.

Dimensions

No Light

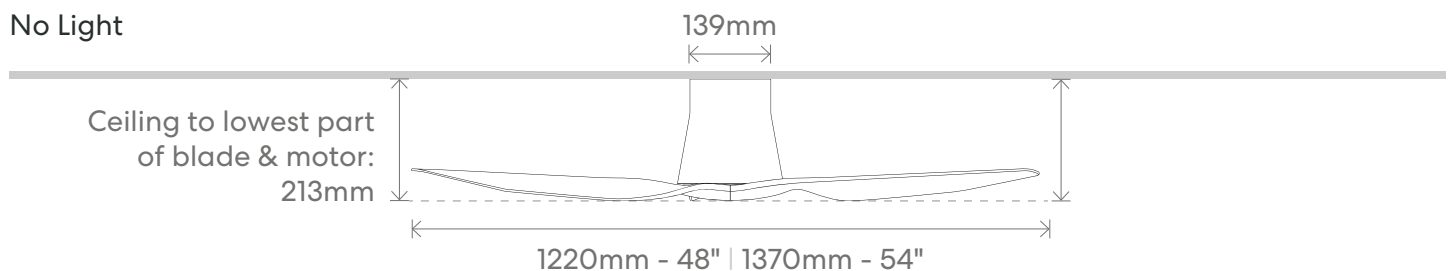

CCT LED Light

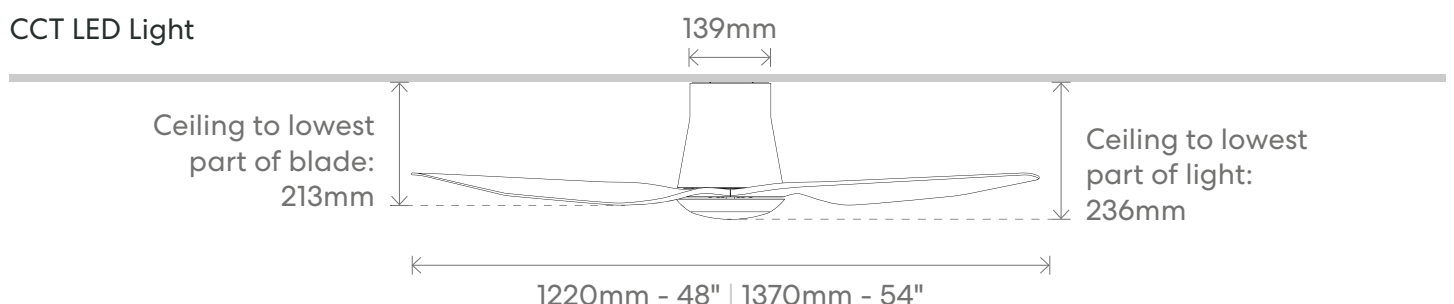

Infinity-iD

Profile DC 60^{III}

The low-profile architectural fan designed for Australian homes, delivering energy-efficient airflow, outdoor versatility & modular SMART control.

White No Light



With Remote

F8110/101A 48"

F8120/101A 54"

SMART Adaptable

White CCT LED Light



With Remote

F8111/101A 48"

F8121/101A 54"

SMART Adaptable

White / Beechwood No Light



With Remote

F8110/121C 48"

F8120/121C 54"

SMART Adaptable

White / Beechwood CCT LED Light



With Remote

F8111/121A 48"

F8121/121A 54"

SMART Adaptable



60"
1520mm

8
Year

**8 Year
Motor Warranty**

2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	14.5
Timer:	1, 4, 8 Hour

Performance 60"

Speed	Wattage	RPM	Airflow
1	2	61	5,251
2	4	85	7,008
3	8	109	8,950
4	14	130	10,219
5	24.5	150	11,532
6	40	180	13,573

Control Options

Remote:


Supplied with no beep remote control.

Remote frequency: 433 MHz




Remote + **SMART** Module:

F9990/000A SMART Module.

Allows fan to be controlled by app, & remote control in tandem.

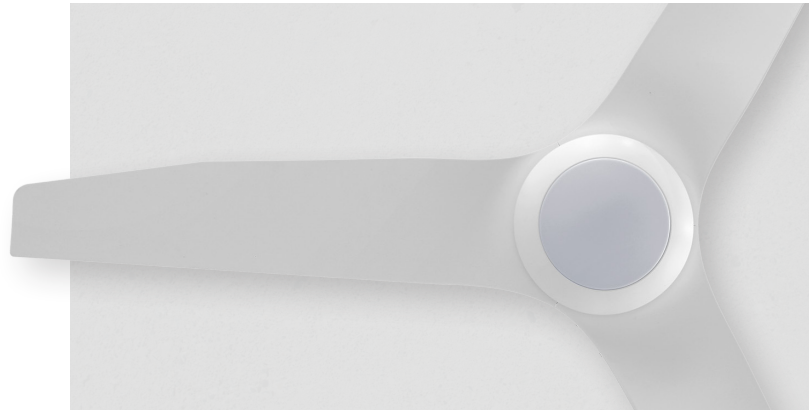

About the CCT LED Light

		
3000k	4000k	5000k
1309 Lumens	1495 Lumens	1608 Lumens


Light Type:

LED (20w)

Dimmable:

Yes (Stepless)


FCSP13-CT002 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



Light Memory: CCT & Brightness settings are retained when fan is turned off / on – from remote or switch.

Dimensions

No Light

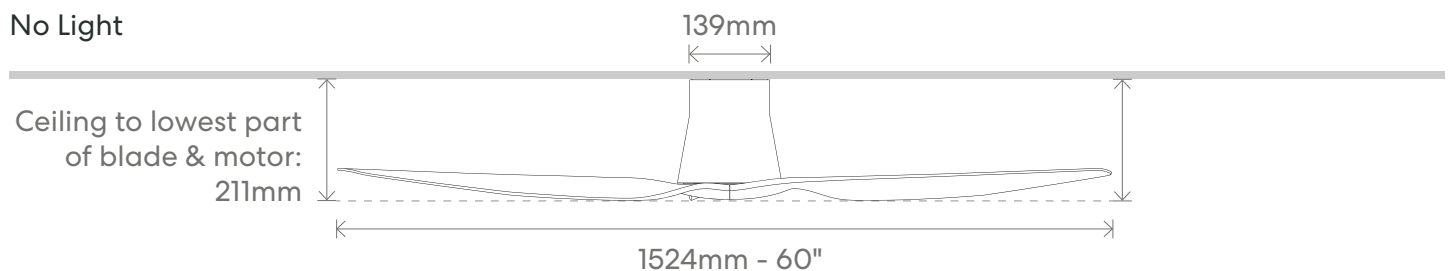

CCT LED Light

