

TT Series

The mixflow inline exhaust fan engineered to operate quietly.

IPX4
Rated

Low
Noise

European
Motor

2
Year

2 year
replacement
warranty


fanco

100:	EXVUTT100	RV models include lead & plug + 2 position speed
125:	EXVUTT125	
150:	EXVUTT150	
150:	EXVUTT150RV	
200:	EXVUTT200	
200:	EXVUTT200RV	
250:	EXVUTT250	Larger models require hardwiring
315:	EXVUTT315	



The external casing is made from polymer coated steel. The housing has an internal heat and sound insulating layer with 50mm mineral wool.



Dimensions (mm)

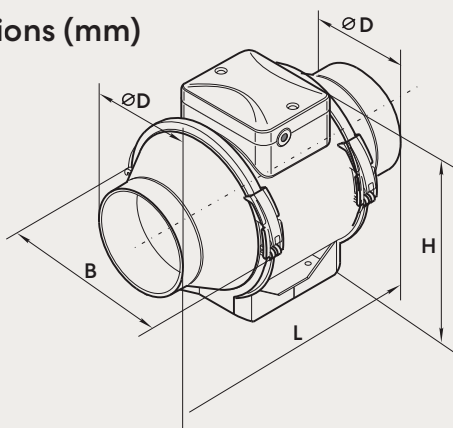

Model	100	125	150	200	250	315
D	96	123	146	199	247	310
B	167	167	223	239	287	362
L	246	246	295	295	383	445
H	190	190	250	247	323	408

TT Series

fanco

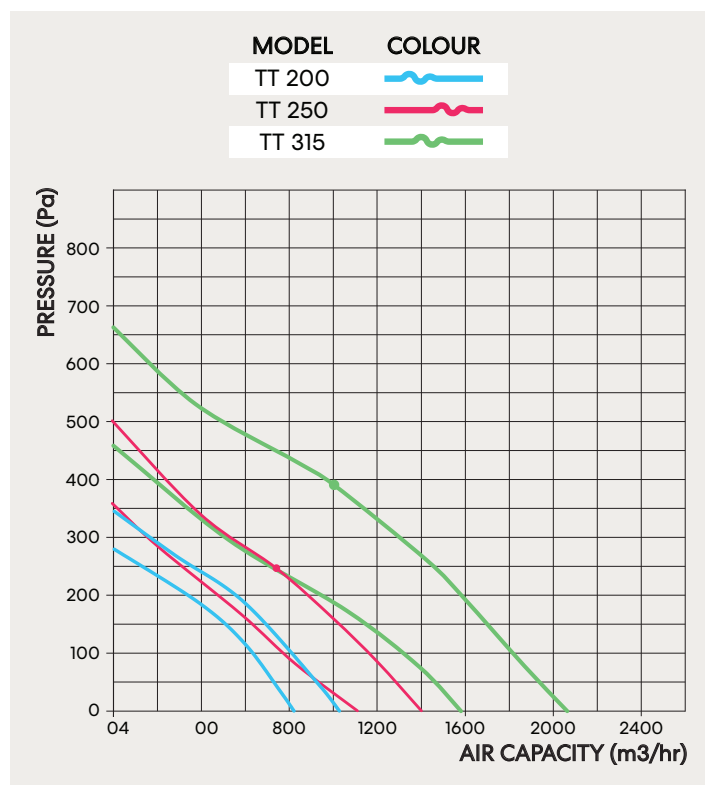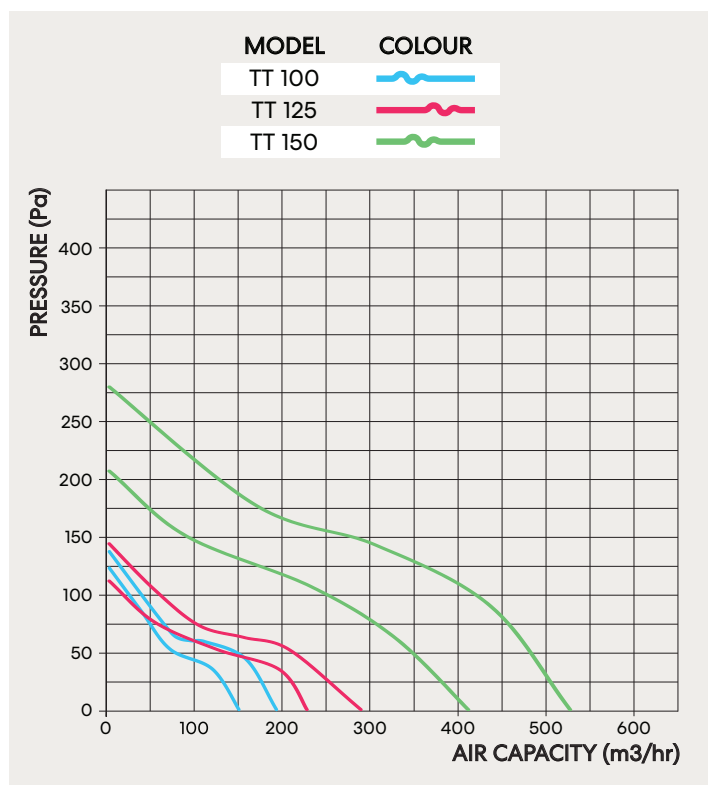

	100 Low / High	125 Low / High	150 / 150RV Low / High	200 / 200RV Low / High	250 Low / High	315 Low / High
Voltage	230 / 230	230 / 230	230 / 230	230 / 230	230 / 230	230 / 230
Current (A)	0.11 / 0.21	0.18 / 0.27	0.17 / 0.27	0.34 / 0.48	0.54 / 0.79	1 / 1.42
Power (w)	21 / 33	23 / 37	30 / 60	76 / 108	125 / 177	230 / 320
Noise Level dB(A)	27 / 36	28 / 37	33 / 44	45 / 52	47 / 55	49 / 58
Capacity (m3/hr)	145 / 187	220 / 280	405 / 520	830 / 1040	1110 / 1400	1570 / 2050
Capacity (l/s)	40.31 / 51.98	61.16 / 77.84	112.59 / 144.56	230.74 / 289.12	308.58 / 389.2	436.56 / 569.9
Capacity (CFM)	85.40 / 110.14	129.58 / 164.92	238.54 / 306.28	488.87 / 612.56	653.79 / 824.6	924.73 / 1207.5
Duct Size (mm)	100	125	150	200	250	315

Maximum temperature of transferred air 60°. The fan is designed for indoor application with the ambient temperature ranging from +1 °C up to +40 °C and relative humidity up to 80 %.