

Eco Silent Deluxe DC

The Eco Silent Deluxe packages all of the year's innovations in a straightforward four blade design.

CFFCESD3WHWABS 52"
CFFCESD4WHWABS - 56"

White
No Light
Wall Control



CFFCESD3WHSRABS 52"
CFFCESD4WHSRABS - 56"

White
No Light
Remote /
Smart (via app)



CFFCESD3LWHSRABS 52"
CFFCESD4LWHSRABS - 56"

White
LED Light
Remote /
Smart (via app)



CFFCESD3BLWABS 52"
CFFCESD4BLWABS - 56"

Black
No Light
Wall Control




CFFCESD3BLSRABS 52"
CFFCESD4BLSRABS - 56"

Black
No Light
Remote /
Smart (via app)



CFFCESD3LBLSRABS 52"
CFFCESD4LBLSRABS - 56"

Black
LED Light
Remote /
Smart (via app)

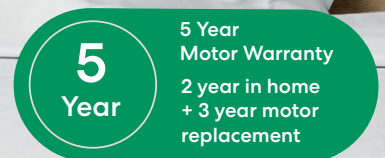

Technical Data

| | |
|-------------------|--|
| Install Location: | Indoor / Outdoor* & Coastal |
| Motor Type: | DC |
| Blade Material: | ABS Plastic |
| Operation: | Wall Control SMART/Remote Remote frequency 2.4 GHz. |

| | |
|----------------------------|--------------|
| Reversible Remote / Smart: | Yes |
| Reversible Wall Control: | No |
| Ceiling Mount Angle: | 0-15° |
| Blade Pitch: | 13° (Approx) |
| Timer: | 1-9 Hour |


About the CCT LED Light



| | | |
|----------------------|----------------------|----------------------|
| 3000k 1300 Lumens | 4200k 1600 Lumens | 5000k 1500 Lumens |
|----------------------|----------------------|----------------------|

| | |
|-------------|---------------|
| Light Type: | LED (18w) |
| Dimmable: | Yes (8 Steps) |

SP-CFFCESD-LEDMOD - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

52" SMART / Remote

| Speed | Wattage | RPM | Airflow |
|-------|---------|-----|--------------|
| 1 | 5w | 60 | 3,911 m3/hr |
| 2 | 7w | 90 | 5,242 m3/hr |
| 3 | 10w | 122 | 6,394 m3/hr |
| 4 | 16w | 151 | 7,454 m3/hr |
| 5 | 25w | 185 | 9,202 m3/hr |
| 6 | 35w | 215 | 11,060 m3/hr |

56" SMART / Remote

| Speed | Wattage | RPM | Airflow |
|-------|---------|-----|--------------|
| 1 | 5w | 60 | 5,631 m3/hr |
| 2 | 7w | 88 | 6,953 m3/hr |
| 3 | 10w | 116 | 8,824 m3/hr |
| 4 | 15w | 145 | 10,630 m3/hr |
| 5 | 24w | 174 | 13,874 m3/hr |
| 6 | 35w | 200 | 15,639 m3/hr |



52" Wall Control

| Speed | Wattage | RPM | Airflow |
|-------|---------|-----|--------------|
| 1 | 7w | 90 | 5,256 m3/hr |
| 2 | 9.5w | 115 | 6,156 m3/hr |
| 3 | 13.5w | 140 | 7,038 m3/hr |
| 4 | 20.6w | 165 | 8,473 m3/hr |
| 5 | 26.2w | 190 | 9,474 m3/hr |
| 6 | 35w | 215 | 11,060 m3/hr |

56" Wall Control

| Speed | Wattage | RPM | Airflow |
|-------|---------|-----|--------------|
| 1 | 7.2w | 90 | 7,069 m3/hr |
| 2 | 9.8w | 112 | 8,648 m3/hr |
| 3 | 13.7w | 136 | 9,563 m3/hr |
| 4 | 18.5w | 156 | 11,956 m3/hr |
| 5 | 25.8w | 178 | 14,021 m3/hr |
| 6 | 35w | 200 | 15,639 m3/hr |

Dimensions

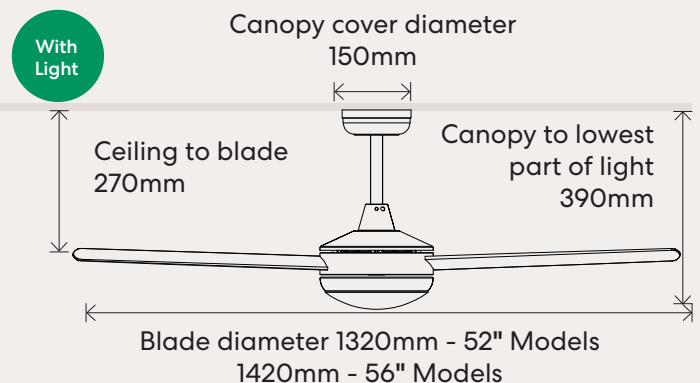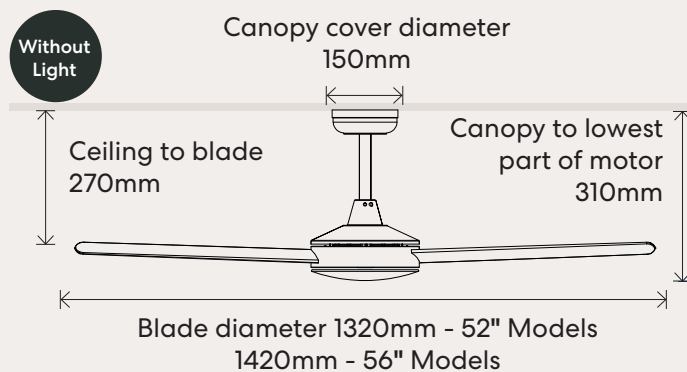

Extension Rods

W-CRFCMK90WH
White 900mm

W-CRFCMK90BL
Black 900mm

W-CRFCMK150WH
White 1500mm

W-CRFCMK150BL
Black 1500mm